


10 Easy Steps to Quick Installation

For the CG 2400 PC Cordless Phone System



NOTE: Do not attach the base station to your PC until instructed to do so. If you run into difficulties, see "Chapter 2: Installation" in your CG 2400 User Guide for more information.

1 Unpack the Components

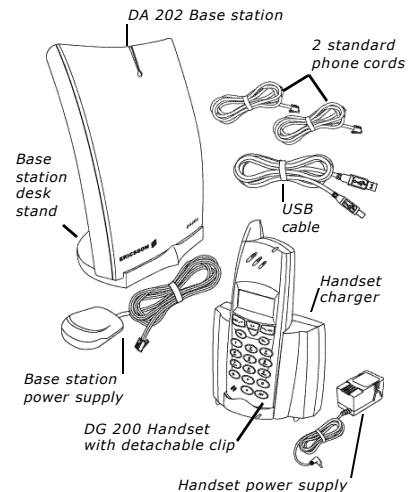


Not shown:


- Base station wall mount
- Battery pack for the handset
- CyberGenie@Work CD-ROM
- CG 2400 User Guide
- Handset Quick Reference

2 Install the Handset Battery

- Remove the cover from the back of the handset.
- Plug the battery wire into the white connector inside the handset at the top right.

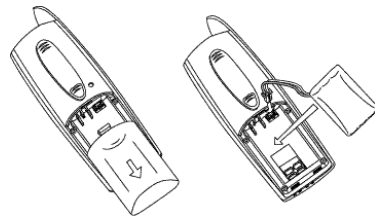

- Route the wire through the guide.

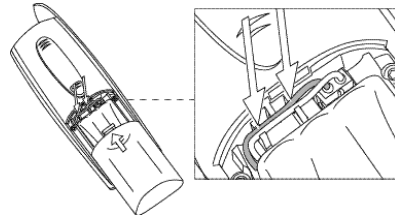

- Place the battery securely inside the battery compartment.
- Replace the cover.

3 Charge the Handset

NOTE: If using the wall mount, install mount on wall before connecting the charger to the mount.

- Insert the power supply plug into the socket on the back of the charger.
- Attach the mount to the charger.
- Plug the power supply into an approved electrical outlet.
- If the handset is on, press **NO** until the handset turns off.
- Insert the handset securely into the charger.
- While charging, the green indicator light on the charger will be on. When the handset is fully charged, the indicator light will go off.

NOTE: Let your handset charge for at least three hours before first use.

4 Before Installing Software

- Close any open software programs.
- From the Windows **Start** menu, select **Settings > Control Panel**.
- Click **Power Management**.
- On the Power Schemes tab, select **Always On**.
- Select **Never** for **System standby** (not present in all installations).
- Select **Never** for **Turn off hard disk**.
- Click **OK** to save.

NOTE: If using Microsoft® Outlook®, see "Ensuring Outlook Support" on page 20 of your CG 2400 User Guide before installing CyberGenie@Work.



5 Install the Software

NOTE: Do not attach the base station to your PC until instructed to during the installation process!

- Insert the CyberGenie@Work CD into your CD-ROM drive.
- When the installation program loads, click **Install**.
- Follow the screen instructions until the prompt appears: **Connect the base station to your PC USB port**. At this point, pause the software installation procedure and prepare the base station.


6 Prepare the Base Station

- Remove the warning sticker on the bottom of the base station so the sockets are visible.
- Mount base station:
For desktop use, attach the base station to the stand as shown.
For wall mounting, see "To mount the base station:" on page 23 of your CG 2400 User Guide.

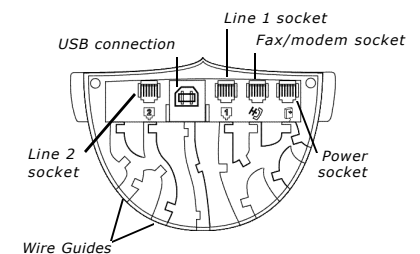

7 Connect the Cables

- a Connect the cables to the base station (see diagram on other side).
- b Plug the power supply into an approved electrical outlet. Once power is connected, the indicator light on the base station will be amber.
- c Plug the phone line(s) into the appropriate wall phone jacks.
- d If using a fax/modem, plug the modem phone line into base station.
- e Plug the USB cable into the computer. The software will detect the base station and perform a hardware check.
- f When the hardware check is complete, finish software installation by clicking **Yes, I want to restart my computer now.**



8 Run Configuration Wizard

After the computer reboots, the Configuration Wizard will automatically load.

The Configuration Wizard provides enough setup to get your CG 2400 system up and running immediately. For complete configuration (recommended), see "Chapter 4: Full System Configuration" in the *CG 2400 Detailed User Guide* after running the Configuration Wizard.

- a Change the authorization code or click **Next** to keep the default.



- b Enter a system PIN or *leave blank* (recommended to leave blank during installation).



NOTE: If you *do* enter a system PIN, make a note of it! If you forget the system PIN, you will have to reinstall the software to regain system access.

- c Line descriptions are names assigned to external phone lines. At least one line description must be entered for CyberGenie to work. Do not enter a description for a line that is not physically connected.



- d A user is anyone with an assigned handset or who has a mailbox.

You must set up at least one user for CyberGenie to work. Click **New User**, then enter a **first** and **last** name (title optional).



- e Click to assign a handset to the user.
- f If you have contact names already listed in Microsoft Outlook, you can activate the contacts for speech recognition with CyberGenie. To activate, highlight a name, then click **Activate**. Repeat as needed.



9 Register Your Product

You have two options for product registration:

- Click **Registration Form** to print and fax or mail your registration, or
- Click **Register** to complete registration online.

Your CG 2400 system is now fully installed.

10 Use Your Handset!

Once the handset is fully charged, you can use it to place outgoing calls and receive incoming calls. If you set up contacts for voice activation at step 8f, you can also use CyberGenie's call-by-name.

To place a call using the keypad:

- a Pre-dial the number using the handset keypad.

- b Press the key to place the call.

To place a call using CyberGenie:

- a Press the key on the handset.
- b When CyberGenie asks *Who would you like to call?* say the contact name.

To set up your voicemail greeting:

- a Press .
- b When CyberGenie asks *Who would you like to call?* say **CyberGenie**, or press on the handset.
- c Follow CyberGenie's instructions.

Learn More About CyberGenie

Use your *Handset Quick Reference* for tips, shortcuts and steps to handset procedures from the keypad and with CyberGenie speech commands.

For complete procedures, see the *CG 2400 User Guide*:

- "Chapter 1: Introduction" provides a complete product overview.
- "Chapter 3: The User Interface" describes each way of interacting with the system; speech commands, the handset keypad and your PC.
- "Chapter 4: Full System Configuration" covers additional steps for customizing your system.
- Chapters 5-8 give detailed procedures for the many system features available.